

sachtler 

VITEC  
PRODUCTION  
SOLUTIONS



VITEC  
PRODUCTION  
SOLUTIONS

# aktiv™

# aktiv™

[sachtler.com/aktiv](https://sachtler.com/aktiv)





# Level up with aktiv™ the fluid head built for speed.

When you have just one chance to capture the perfect shot, mount, level and lock the revolutionary aktiv™ fluid head in seconds.

Sachtler's unique SpeedLevel™ and SpeedSwap™ technologies deliver the fastest way to place and position your camera; adjust the level in an instant without ever taking your eye off the action; get closer to the ground than ever before for extreme low-angle shots or swap between a tripod, slider, or hand held without missing a beat. Capture the widest range of shots in the shortest time with aktiv™.



## Ambassadors

### Geoff Nelson

*The speed of set up of the flowtech and aktiv system is beyond anything that I've ever used. The flowtech tripod is ready in seconds and the levelling system of the aktiv 14T is lightning fast.*

*The aktiv series and flowtech combination really has no competitor. It allows you to work with a lightweight system that is easy to use, efficient and fast. My experience so far with the 14T has been phenomenal.*




### Stuart Howells

*The range that it enables you to be able to get is just incredible, and that- as a camera operator - means I have no concerns about having time to get that shot- I know with this system I definitely can because it's so quick and it's so easy.*



# Level up and lock your head in an instant.

Never miss the shot. aktiv™ fluid heads feature revolutionary SpeedLevel™ technology. Release, level, and lock your head tightly into the perfect position without missing a second of action.

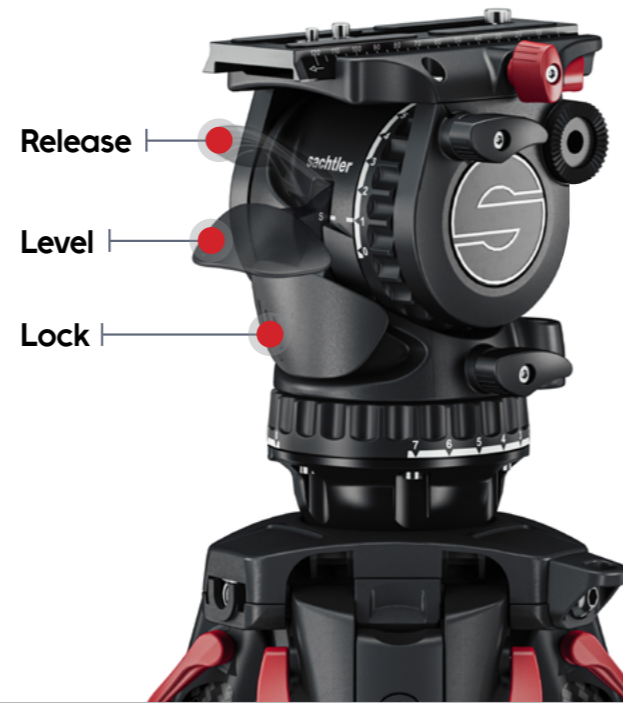

Unique SpeedLevel™ technology.



## Capture extreme low-angle shots right down to the ground.

Go lower than ever. aktiv™ and flowtech® combine to provide a flexible one tripod solution delivering the widest height range. With no bowl clamp required, aktiv™ heads allow flowtech® tripods to go flat to the ground for the perfect low-angle shot.



Innovative streamlined mounting system.

## Switch between tripod and slider in seconds.

Stay fast for ultimate creativity. aktiv™ fluid heads feature the unique SpeedSwap™ system, allowing lightning-fast camera swaps from a tripod to a slider without missing a beat. The perfect camera movement is just a SpeedSwap™ away.



Revolutionary SpeedSwap™ system.

## Visible from any height or angle - day or night.

Clear confirmation that the camera is level comes from the illuminated PrismBubble visible from any height or angle – day or night.



Innovative PrismBubble.



## Head Overview | 75 mm

sachtler



**aktiv™6**  
S2064S



**aktiv™8**  
S2068S



**aktiv™8T**  
S2068T

<b>Bowl</b>	75 mm with SpeedSwap™ base	75 mm with SpeedSwap™ base	75 mm with SpeedSwap™ base
<b>Payload range</b>	0 - 8 kg / 0 - 17.6 lb	0 - 12 kg / 0 - 26.5 lb	0 - 12 kg / 0 - 26.5 lb
<b>Counterbalance steps</b>	15+0	15+0	15+0
<b>Drag setting</b>	3+0	7+0	7+0
<b>Head weight</b>	2.6 kg / 5.7 lb	2.7 kg / 5.9 lb	2.8 kg / 6.2 lb
<b>Camera fitting</b>	Sideload S	Sideload S	Touch & Go plate S
<b>Sliding range</b>	120 mm / 4.7 in	120 mm / 4.7 in	60 mm / 2.4 in
<b>Tilt range</b>	+90° to -70°	+90° to -70°	+90° to -70°
<b>Temperature range</b>	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F

## Head Overview | 100mm

sachtler



**aktiv™10**  
S2072S



**aktiv™10T**  
S2072T



**aktiv™12T**  
S2074T



**aktiv™14T**  
S2076T

<b>Bowl</b>	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base
<b>Payload range</b>	0 - 12 kg / 0 - 26.5 lb	0 - 12 kg / 0 - 26.5 lb	0 - 14 kg / 0 - 30.9 lb	0 - 16 kg / 0 - 35.3 lb
<b>Counterbalance steps</b>	15+0	15+0	15+0	15+0
<b>Drag setting</b>	7+0	7+0	7+0	7+0
<b>Head weight</b>	2.9 kg / 6.4 lb	3 kg / 6.6 lb	3.3 kg / 7.3 lb	3.4 kg / 7.5 lb
<b>Camera fitting</b>	Sideload S	Touch & Go S	Touch & Go 16	Touch & Go 16
<b>Sliding range</b>	120 mm / 4.7 in	60 mm / 2.4 in	70 mm / 2.8 in	70 mm / 2.8 in
<b>Tilt range</b>	+90° to -70°	+90° to -70°	+90° to -70°	+90° to -70°
<b>Temperature range</b>	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F

## System Overview | Mid-level spreader | 75 mm

sachtler



**System aktiv™6  
flowtech75 MS**  
S2064S-FTMS



**System aktiv™8  
flowtech75 MS**  
S2068S-FTMS



**System aktiv™8T  
flowtech75 MS**  
S2068T-FTMS

<b>Bowl</b>	75 mm with SpeedSwap™ base	75 mm with SpeedSwap™ base	75 mm with SpeedSwap™ base
<b>Payload range</b>	0 - 8 kg / 0 - 17.6 lb	0 - 12 kg / 0 - 26.5 lb	0 - 12 kg / 0 - 26.5 lb
<b>Counterbalance steps</b>	15+0	15+0	15+0
<b>Drag setting</b>	3+0	7+0	7+0
<b>System weight</b>	6.2 kg / 13.7 lb	6.3 kg / 13.9 lb	6.4 kg / 14.1 lb
<b>Camera fitting</b>	Sideload S	Sideload S	Touch & Go S
<b>Sliding range</b>	120 mm / 4.7 in	120 mm / 4.7 in	60 mm / 2.4 in
<b>Tilt range</b>	+90° to -70°	+90° to -70°	+90° to -70°
<b>Temperature range</b>	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F
<b>Height range with spreader</b>	79 - 174 cm / 31 - 68.5 in	79 - 174 cm / 31.1 - 68.5 in	79 - 174 cm / 31.1 - 68.5 in
<b>Height range without spreader</b>	23 - 170 cm / 9 - 66.9 in	23 - 170 cm / 9 - 66.9 in	23 - 170 cm / 9 - 66.9 in
<b>Transport length</b>	85 cm / 33.5 in	85 cm / 33.5 in	85 cm / 33.5 in
<b>Tripod stages</b>	2	2	2
<b>Tripod material</b>	Carbon fibre	Carbon fibre	Carbon fibre

## System Overview | Grounder spreader | 75 mm

sachtler



**System aktiv™6  
flowtech75 GS**  
S2064S-FTGS



**System aktiv™8  
flowtech75 GS**  
S2068S-FTGS



**System aktiv™8T  
flowtech75 GS**  
S2068T-FTGS

<b>Bowl</b>	75 mm with SpeedSwap™ base	75 mm with SpeedSwap™ base	75 mm with SpeedSwap™ base
<b>Payload range</b>	0 - 8 kg / 0 - 17.6 lb	0 - 12 kg / 0 - 26.5 lb	0 - 12 kg / 0 - 26.5 lb
<b>Counterbalance steps</b>	15+0	15+0	15+0
<b>Drag setting</b>	3+0	7+0	7+0
<b>System weight</b>	6.4 kg / 14.1 lb	6.5 kg / 14.3 lb	6.6 kg / 14.5 lb
<b>Camera fitting</b>	Sideload S	Sideload S	Touch & Go S
<b>Sliding range</b>	120 mm / 4.7 in	120 mm / 4.7 in	60 mm / 2.4 in
<b>Tilt range</b>	+90° to -70°	+90° to -70°	+90° to -70°
<b>Temperature range</b>	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F
<b>Height range with spreader</b>	56 - 176 cm / 22 - 69.3	56 - 176 cm / 22 - 69.3	56 - 176 cm / 22 - 69.3
<b>Height range without spreader</b>	23 - 170 / 9 - 66.9 in	23 - 170 / 9 - 66.9 in	23 - 170 / 9 - 66.9 in
<b>Transport length</b>	85 cm / 33.5 in	85 cm / 33.5 in	85 cm / 33.5 in
<b>Tripod stages</b>	2	2	2
<b>Tripod material</b>	Carbon fibre	Carbon fibre	Carbon fibre



# System Overview | Mid-level spreader | 100 mm



**System aktiv™10  
flowtech100 MS**  
S2072S-FTMS



**System aktiv™10T  
flowtech100 MS**  
S2072T-FTMS



**System aktiv™12T  
flowtech100 MS**  
S2074T-FTMS



**System aktiv™14T  
flowtech100 MS**  
S2076T-FTMS

<b>Bowl</b>	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base
<b>Payload range</b>	0 - 12 kg / 0 - 26.5 lb	0 - 12 kg / 0 - 26.5 lb	0 - 14 kg / 0 - 30.9 lb	0 - 16 kg / 0 - 35.3 lb
<b>Counterbalance steps</b>	15+0	15+0	15+0	15+0
<b>Drag setting</b>	7+0	7+0	7+0	7+0
<b>System weight</b>	6.9 kg / 15.2 lb	7 kg / 15.3 lb	7.4 kg / 16.3 lb	7.5 kg / 16.5 lb
<b>Camera fitting</b>	Sideload S	Touch & Go S	Touch & Go 16	Touch & Go 16
<b>Sliding range</b>	120 mm / 4.7 in	60 mm / 2.4 in	70 mm / 2.8 in	70 mm / 2.8 in
<b>Tilt range</b>	+90° to -70°	+90° to -70°	+90° to -70°	+90° to -70°
<b>Temperature range</b>	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F
<b>Height range with spreader</b>	71 - 172 cm / 27.9 - 67.7 in	71 - 172 cm / 27.9 - 67.7 in	71 - 172 cm / 27.9 - 67.7 in	71 - 172 cm / 27.9 - 67.7 in
<b>Height range without spreader</b>	23 - 170 cm / 9 - 66.9 in	23 - 170 cm / 9 - 66.9 in	23 - 170 cm / 9 - 66.9 in	23 - 170 cm / 9 - 66.9 in
<b>Transport length</b>	87 cm / 34.3 in	87 cm / 34.3 in	87 cm / 34.3 in	87 cm / 34.3 in
<b>Tripod stages</b>	2	2	2	2
<b>Tripod material</b>	Carbon fibre	Carbon fibre	Carbon fibre	Carbon fibre

System without spreader also available - aktiv10 flowtech100 (S2072S-FT)

# System Overview | Grounder spreader | 100 mm



**System aktiv™10  
flowtech100 GS**  
S2072S-FTGS



**System aktiv™10T  
flowtech100 GS**  
S2072T-FTGS



**System aktiv™12T  
flowtech100 GS**  
S2074T-FTGS



**System aktiv™14T  
flowtech100 GS**  
S2076T-FTGS

<b>Bowl</b>	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base	100 mm with SpeedSwap™ base
<b>Payload range</b>	0 - 12 kg / 0 - 26.5 lb	0 - 12 kg / 0 - 26.5 lb	0 - 14 kg / 0 - 30.9 lb	0 - 16 kg / 0 - 35.3 lb
<b>Counterbalance steps</b>	15+0	15+0	15+0	15+0
<b>Drag setting</b>	7+0	7+0	7+0	7+0
<b>System weight</b>	6.8 kg / 15 lb	7 kg / 15.3 lb	7.3 kg / 16.1 lb	7.4 kg / 16.3 lb
<b>Camera fitting</b>	Sideload S	Touch & Go S	Touch & Go 16	Touch & Go 16
<b>Sliding range</b>	120 mm / 4.7 in	60 mm / 2.4 in	70 mm / 2.8 in	70 mm / 2.8 in
<b>Tilt range</b>	+90° to -70°	+90° to -70°	+90° to -70°	+90° to -70°
<b>Temperature range</b>	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F	-40°C to +60°C / -40°F to +140°F
<b>Height range with spreader</b>	60 - 176 cm / 23.6 - 69.3 in	60 - 176 cm / 23.6 - 69.3 in	60 - 176 cm / 23.6 - 69.3 in	60 - 176 cm / 23.6 - 69.3 in
<b>Height range without spreader</b>	23 - 170 cm / 9 - 66.9 in	23 - 170 cm / 9 - 66.9 in	23 - 170 cm / 9 - 66.9 in	23 - 170 cm / 9 - 66.9 in
<b>Transport length</b>	87 cm / 34.3 in	87 cm / 34.3 in	87 cm / 34.3 in	87 cm / 34.3 in
<b>Tripod stages</b>	2	2	2	2
<b>Tripod material</b>	Carbon fibre	Carbon fibre	Carbon fibre	Carbon fibre

System without spreader also available - aktiv10 flowtech100 (S2072S-FT)

# SpeedSwap™ Accessories

Switch between tripod and slider in seconds with the revolutionary SpeedSwap™ system. Stay fast for ultimate creativity. All aktiv fluid heads feature the unique SpeedSwap system, allowing lightning-fast camera swaps from a tripod to a slider without missing a beat. **The perfect camera movement is just a SpeedSwap away.**



sachtler



**Adaptor aktiv™  
head / slider 75 mm**  
S2080-0003



**Adaptor aktiv™  
slider / tripod 75 mm**  
S2080-0005



**Adaptor  
aktiv head / slider 100 mm**  
S2080-0004



**Adaptor  
aktiv slider / tripod 100 mm**  
S2080-0006