

# Drawmer



## DA6 Balanced Distribution Amplifier

The distribution of mono and stereo balanced audio signals from a single source to multiple destinations has many applications including multi-zone sound reinforcement installations, live sports events coverage, broadcast studios, video suites, duplication, or indeed anywhere where high quality audio has to be distributed to a number of locations down long cable runs.

The Drawmer DA6 is a six channel stereo (or twelve channel mono) distribution amplifier featuring XLR balanced inputs and outputs with optional transformer balancing where remote amplifiers and recorders are fed from separate power supplies. The stereo input features individual left / right level controls with LED bargraph metering enabling the correct balancing of stereo material or two mono signals. Each of the six outputs incorporate further left/right level controls and a mono/stereo switch providing the selection of either one stereo output or two mono outputs per channel. This feature allows the DA6 to function as either a 1 x stereo input / 6 x stereo outputs or 2 x mono input / 12 x mono output unit or any combination of the two.

The output section consists of a channel select so that the individual left / right output level of each channel is displayed on the output LED bargraph and can be monitored by the headphone jack socket. A pair of auxiliary link 1/4 inch stereo jack sockets (TRS) are provided via the rear panel for connection to further DA6 units for the distribution of even more channels.

Audio connections: Inputs / Outputs XLR balanced (pin 1 - screen, pin 2 - positive, pin 3 - negative).

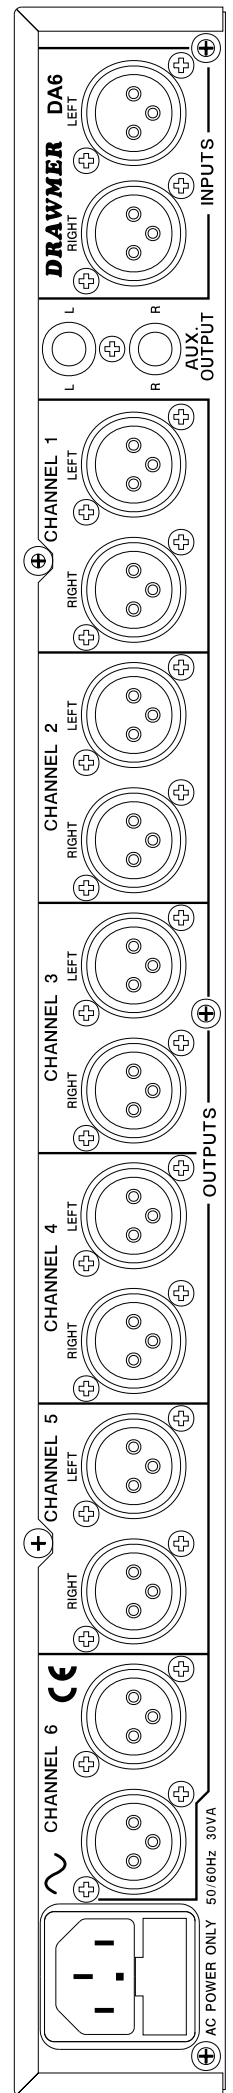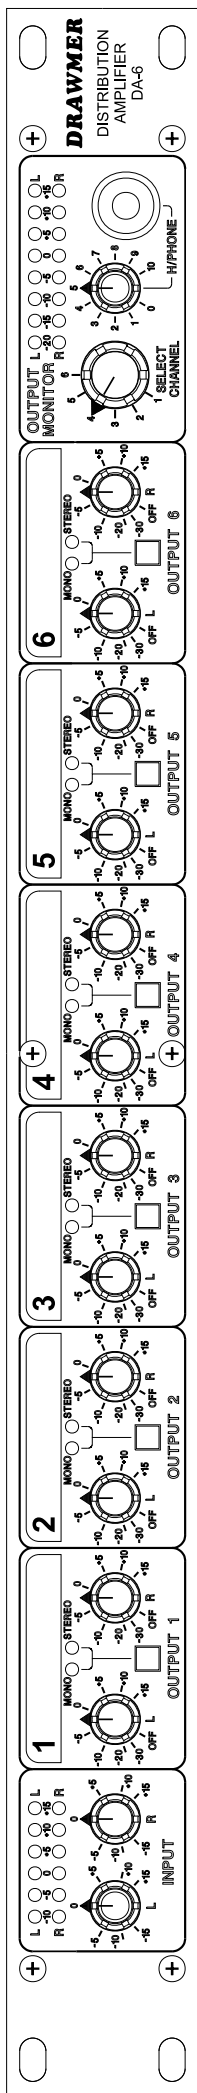

DRAWMER UK  
PHONE: +44 1924 378669  
FAX: +44 1924 290460  
WWW.DRAWMER.COM  
SALES@DRAWMER.CO.UK